

## PRECAST MANHOLE WITH INTERNAL SEAL


1.) THE RUBBER SEAL IS AVAILABLE IN HEIGHTS OF 8.5" AND 10". EXTENSIONS ARE AVAILABLE IN 7" AND 10". ALL SEALS AND EXTENSIONS USE THE SAME EXPANSION RING.

3.) THE TOP OF THE CONE SHALL HAVE A MINIMUM OF 3" HIGH SMOOTH VERTICAL SEALING SURFACE.

2.) SEE THE CHIMNEY HEIGHT TABLE (RIGHT) FOR SEAL AND EXTENSION COMBINATIONS NEEDED TO EXTEND FROM THE FRAME TO THE TOP OF THE CONE ON MANHOLE WITH VARIOUS CHIMNEY HEIGHTS. FRAME OFFSETS OR DIAMETER DIFFERENTIALS WILL REDUCE THESE SPAN HEIGHTS.

## SPAN HEIGHT TABLE

COMBINATIONS OF SEALS AND EXTENSIONS	TO SPAN HEIGHTS OF:	
	8.5"	10"
SEAL ONLY	0" TO 4.5"	2" TO 7.5"
SEAL + 7" EXTENSION	OVER 4.5" - 10.5"	OVER 7.5" - 13.5"
SEAL + 10" EXTENSION	OVER 10.5" - 13"	OVER 13.5" - 16"
SEAL + MULTI EXTENSIONS	OVER 13"	OVER 16"
ADD 6" OF COVERAGE FOR EACH ADDITIONAL 7" EXTENSION ADD 8.5" OF COVERAGE FOR EACH ADDITIONAL 10" EXTENSION		

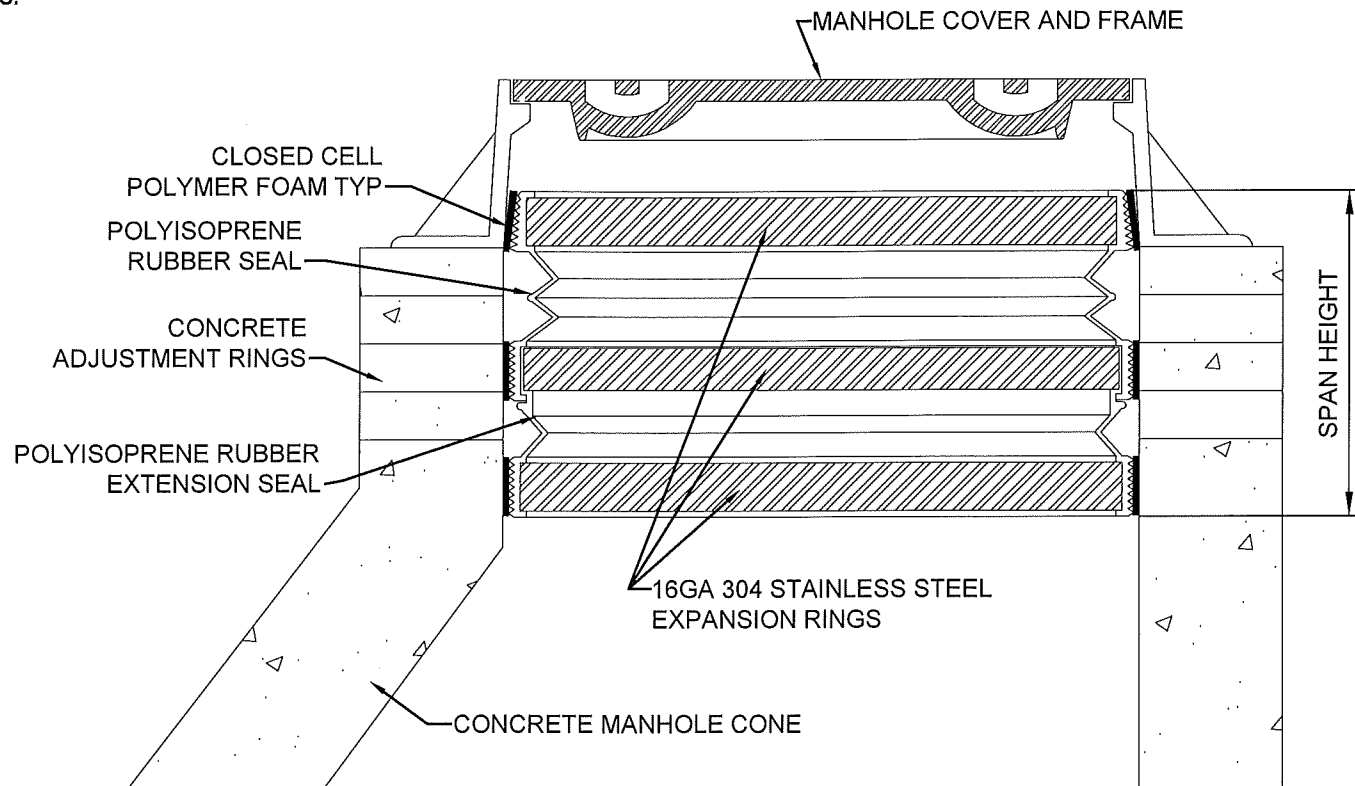

Sealing Systems, Inc.  
 9350 CR 19  
 Loretto, MN 55357  
 763-478-2057 / 800-478-2054  
 Fax 763-478-8868



# INTERNAL UNI-BAND WITH STAINLESS STEEL EXPANSION RINGS